Two ways sperich valve

Steering control: Flange for Actuator ISO 5211 - DIN 3337
Connection: ISO 228 threaded F/F
Passage: Total
Material: Aisi 304 - 316
Measures: from 1/4" to 4"
Gaskets: P.T.F.E. vergin
Working temperature: -20°C +160°C
Outer finish: Polish

On request:
- Threading ISO 7
- Threading NPT

- Gaskets in: PTFE glass charged
PTFE Carbon graphite charged
high density polyethylene

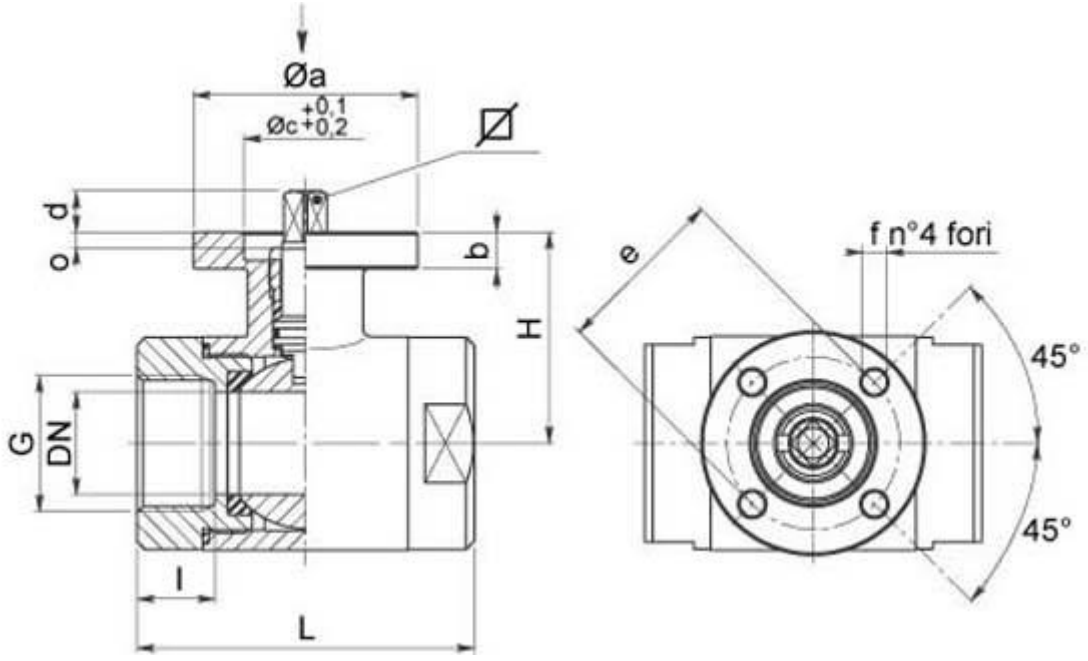

G	DN	L	I	H	PN	Kg	ISO-DIN	Ø a	b	Ø cxo	□	d	e	f	n°4 screws	Nm *
1/4"	9	52	13	39	64	0,35	F.03	46	9	25x3	9	8	36	6	M5x16	5
1/4"	9	52	13	39	64	0,39	F.04	54	9	30x3	11	10	42	6	M5x16	5
3/8"	10	52	13	39	64	0,34	F.03	46	9	25x3	9	8	36	6	M5x16	5
3/8"	10	52	13	39	64	0,38	F.04	54	9	30x3	11	10	42	6	M5x16	5
1/2"	15	62	15	41,5	64	0,45	F.03	46	9	25x3	9	8	36	6	M5x16	8
1/2"	15	62	15	41,5	64	0,50	F.04	54	9	30x3	11	10	42	6	M5x16	8
3/4"	20	72	17	45	64	0,64	F.03	46	9	25x3	9	8	36	6	M5x16	12
3/4"	20	72	17	45	64	0,68	F.04	54	9	30x3	11	10	42	6	M5x16	12
1"	25	82	19	51,5	40	0,90	F.04	54	9	30x3	11	10	42	6	M5x16	15
1"	25	82	19	51,5	40	0,95	F.05	65	9	35x3	14	13	50	7	M6x16	15
1"1/4	32	92	19	56,5	40	1,30	F.04	54	9	30x3	11	10	42	6	M5x16	18
1"1/4	32	92	19	56,5	40	1,34	F.05	65	9	35x3	14	13	50	7	M6x16	18
1"1/2	40	104	20	76	40	2,31	F.05	65	12	35X4	14	13	50	7	M6X20	25
1"1/2	40	104	20	76	40	2,48	F.07	90	12	55x4	17	15	70	9	M8x20	25
2"	50	116	20	84	25	3,40	F.05	65	12	35x4	14	13	50	7	M6x20	30
2"	50	116	20	84	25	3,56	F.07	90	12	55x4	17	15	70	9	M8x20	30
2"1/2	65	128	20	94,5	25	5,75	F.07	90	12	55x4	17	15	70	9	M8x20	45
2"1/2	65	128	20	94,5	25	6,25	F.10	125	12	70x4	22	18	102	11	M10x25	45
3"	80	150	24	106	25	8,93	F.07	90	12	55x4	17	15	70	9	M8x20	70
3"	80	150	24	106	25	9,43	F.10	125	12	70x4	22	18	102	11	M10x25	70
4"	100	178	26	120	25	14,80	F.07	90	12	55x4	17	15	70	9	M8x20	80
4"	100	178	26	120	25	15,70	F.10	125	12	70x4	22	18	102	11	M10x25	80

Notes board:

* Max opening starting point in Nm

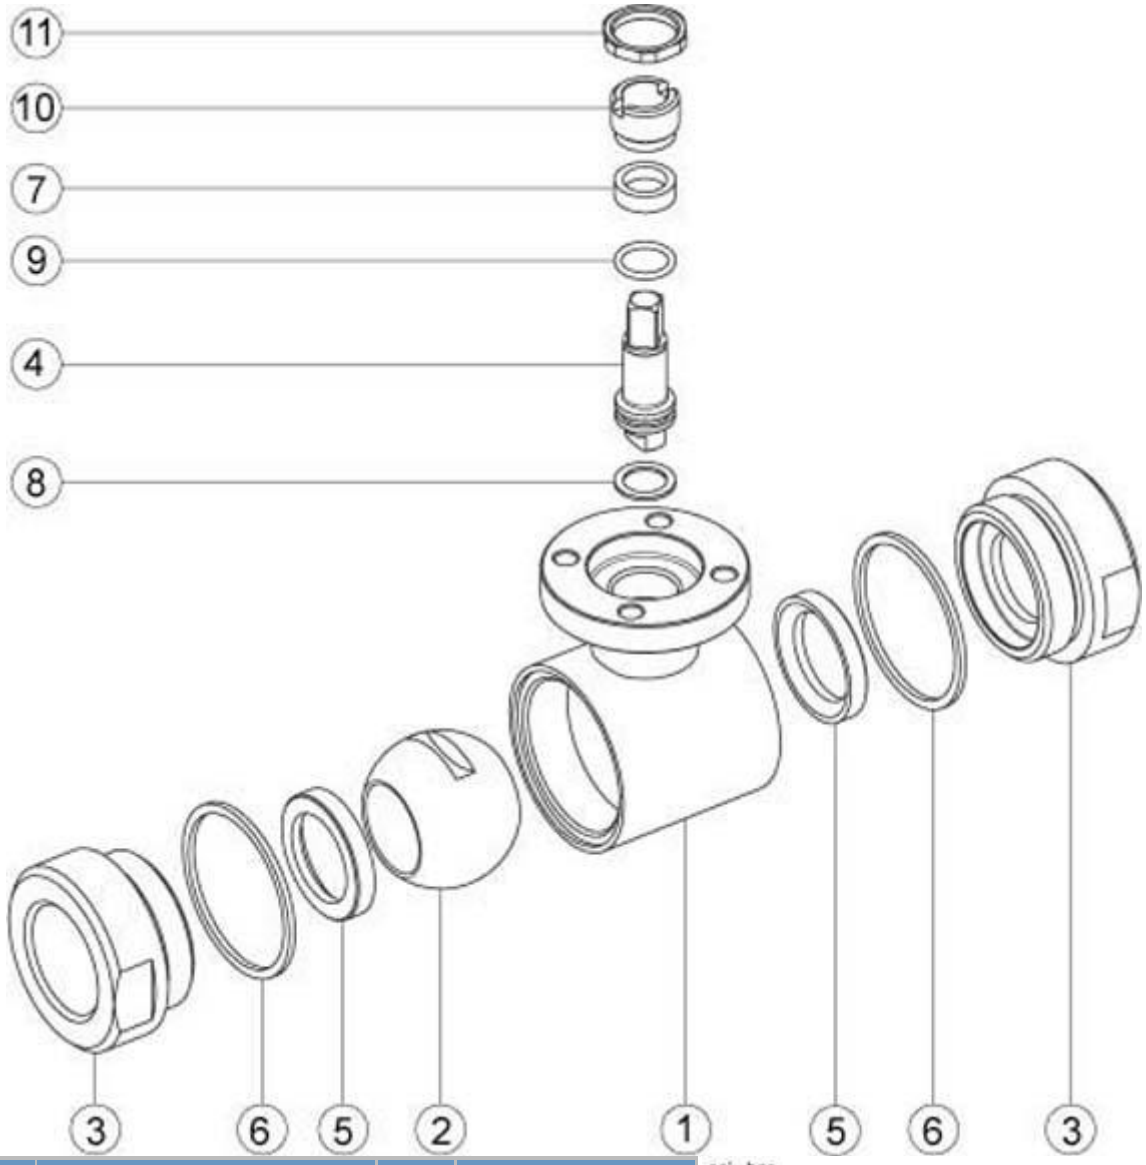
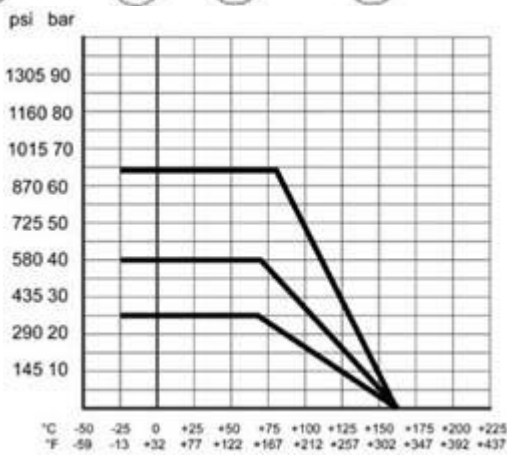
Pos.	Denomination	P.cs	Mat.
1	Body	1	AISI 304 - 316
2	Sphere	1	AISI 304 - 316
3	Sleeves	2	AISI 304 - 316
4	Pivot	1	AISI 304 - 316
5	Spheric gasket	2	PTFE
6	Sleeves gasket	2	PTFE
7	Pivot gasket	1	PTFE
8	Pivot gasket	1	PTFE
9	OR pitvot capacity	1	FKM (Viton)
10	Register Ring.nut	1	AISI 304 (303)
11	Locknut	1	AISI 303